

ACT 1560



POSBANK[®]
EUROPE

Datasheet / Ficha técnica / Fiche technique / Datenblatt





ACT Main features

- Android/Intel® Celeron® deployment
- Slim and compact design to save space on counter
- 15.6-inch PCAP touch display with precise touch
- Bezel-Free Display Utilizable Interface
- Plenty of I/O ports support Easy system expansion
- Fast installation/maintenance
- Distribution, restaurant, specialty store, franchise industry optimization



ACT Características principales

- Desarrollado en Android
- Diseño fino y compacto para ahorrar espacio en mostrador
- Pantalla capacitiva de 15.6" con display táctil de alta sensibilidad
- Interfaz de uso completo gracias a su pantalla sin marco
- Completo sistema de puertos para una fácil expansión
- Rápida instalación y mantenimiento
- Óptimo para: Venta mayorista, restauración, tiendas de especialidades, franquicias.



ACT Principales Caractéristiques

- Développé sur Android
- Conception fine et compacte pour économiser de l'espace sur le comptoir
- Écran capacitif de 15,6 pouces avec haute sensibilité tactile
- Interface d'utilisation complète grâce à son écran sans cadre
- Système de ports complet pour une extension facile
- Installation et maintenance rapides
- Optimal pour: Vente en gros, restaurants, magasins spécialisés, franchises.



ACT-Hauptmerkmale


- Android Betriebssystem
- Schlankes und kompaktes Design, um Platz auf der Theke zu sparen
- Kapazitiver 15,6-Zoll-Bildschirm mit hochempfindlichem Touch-Display
- Vollwertige Bedienoberfläche dank rahmenlosem Display
- Zahlreiche I/O-Ports unterstützen einfache Systemerweiterung
- Schnelle Installation und einfache Wartung
- Optimal für: Großhandel, Gastronomiebetriebe, Fachgeschäfte, Franchise-Unternehmen.

ACT 1560




POSBANK®
EUROPE

Features & Benefits / Características y Ventajas /
Caractéristiques et Avantages / Merkmale und Vorteile

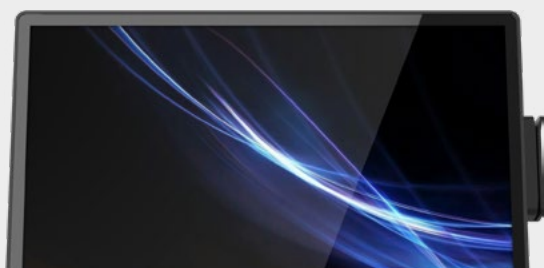

Display

Bright and clear, with a delicate touch



Performance

Equipped with high-performance processor



Design

Brighten up the store environment efficiently



Serviceability

Cost reduction



Connectivity

Easy expansion and maintenance



Peripherals & options

One solution, many options

Specifications / Especificaciones / Spécifications / Spezifikation

Ver. 2023/05

SYSTEM

Processors	Windows / Intel® Celeron® Processor N6210 1.5M Cache, up to 2.60 GHz (Dual Core) Android / RK3399 Android / Dual-core Cortex-A72 up to 1.8GHz Android / Quad-core Cortex-A53 up to 1.4GHz
Memory	Windows / 4GB Standard, DDR4 3200 MT/s, 1 x Socket x SODIMM Android / 4GB Standard, DDR4, On-board
Storage	Windows / Form Factor NVMe M.2 2242-D2-M (No capacity limit.) Mountable quantity: Up to 2 units can be installed. * Factory Default : NVMe M.2 2242 128GB Android / eMMC 32GB, On-board (Max. 256GB)
Operating Systems	Windows / Windows 10 IoT Enterprise LTSC Android / Android 12
Audio	HD Audio Codec

DISPLAY

Type	15.6" TFT LCD, LED Backlight (eDP Interface), Projected Capacitive Touch
Resolution	1920 x 1080
Brightness	300 cd/m ² (typ.)

INTERFACE

Display	1 x Displayport, MiniDP (Only compatible with ACT-only products)
LAN	1 x Gigabit Ethernet, RJ-45
WiFi / BT	Android / BT(V4.0)+ WLAN (802.11 a/b/g/n, 2.4G) combo module, On-board (Factory Option)
CashDrawer Port	1 x CashDrawer Port (RJ-12, 6 Pins (GPIO Communication))
Audio & Speaker	1 x Line-out / 1W (Mono)
Power DC-IN	4 Pin DIN Jack
USB	Windows / Rear 5 (2 x USB 3.0, 2 x USB 2.0, 1 x USB-C) Android / Rear 5 (4 x USB 2.0, 1 x USB-C)
Serial Port	Windows / External 3 / COM1~2 RJ45 , with DTR / 12V Power Output on 6 Pins, BIOS Windows / External 3 / COM4 MiniDP, Only TX/RX, 12V Power Output, Reserved for CDP Windows / Internal 1 / COM3 FPC Connector, Only TX/RX, Reserved for MSR Android / External 2 / COM1 RJ45 , Full Signal Android / External 2 / COM3 MiniDP, Only TX/RX, 12V Power Output, Reserved for CDP Android / Internal 1 / COM2 FPC Connector, Only TX/RX, Reserved for MSR

POWER

Power Supply	Adapter 12V, 5A (4 Pin Din Jack)
---------------------	----------------------------------

OPTIONS & PERIPHERALS

2nd Displays	9.7" (1024 x 768), 13.3" (1920 x 1080) LCD Display, Optional Touchscreen
Customer Display	VFD, 20 Columns x 2 Lines
I/O Expansion	Support I/O Expansion Box
Storage	NVME M.2 128G
Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track
Smart Card Reader	EMV Level 1, 2
Dallas	Dallas i-button Reader
Fingerprint	Yes
Wall Mount Kit	VESA-Compatible 100 x 100 (mm)
Camera	5M USB Interface (Internal) [Factory Option]
Speaker	2 x 0.7W (Stereo) [Factory Option]
WiFi / Bluetooth	Combo Module, M.2 [Factory Option]

* Specifications may change without prior notice.